


Activated Carbon Filter Cartridge

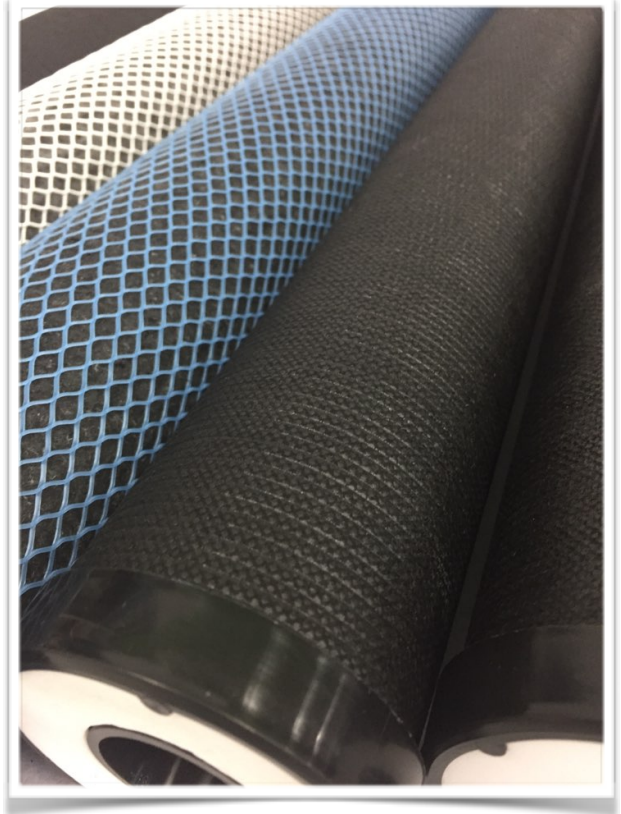

카본 필터 카트리지는 음용수, 수성 및 유기용제(색상, 냄새 및 미각 오염물제거용), 도금욕(니켈 및 구리욕에서 유기 오염물질 제거용) 등에 적합합니다.

Activated carbon filter cartridges are suitable for potable water, water based and organic solvents (for removal color, smell and taste contamination), galvanic bath(for removal of organic contamination from nickel and copper baths.)

Specification

- 여과등급 Filtration rating
5~7 μm
- 길이 Length : 250, 254(10"),
500, 508MM(20")
- 외경 Outside Diameter
62~65mm
- 내경 Inside Diameter
28mm, 30mm
- 최대 사용차압 Max. differential pressure
40 psid (2.7 bar) @24°C
- 최대 사용온도 Max. operating Temperature
70°C @ 30 psid (2.1bar)

Features & Benefits

- 염소 및 유기화합물에 대한 우수한 흡착특성
- 여과액에 활성탄입자가 통과하는것을 방지
- 필터설계
 - 여재: 다공성 활성탄, 합성섬유
 - 가스켓: EPDM, NBR, Viton
 - 내부지지대/캡/망: 폴리프로필렌
 - 활성탄의 무게: 90-114g/250mm
- Excellent adsorption characteristics for chlorine and organic compounds
- Prevent carbon particles passing into the filtrate
- Design of filter
 - Filter materials: Bonded porous activated carbon block & Synthetic fiber
 - Gaskets: EPDM, NBR, Viton
 - Core/End caps/Net; Polypropylene
 - Weights of activated carbon: 90-114g/250mm